

Wireless PM2.5 Air Quality Sensor

Model: DP200

Contents

| | |
|--------------------------------------|----|
| 1. Introduction..... | 2 |
| 2. Get Started | 3 |
| 2.1 Parts List..... | 3 |
| 3. Overview..... | 4 |
| 4. Setup Guide | 5 |
| 5. Mounting..... | 6 |
| 6. Wi-Fi Configure with gateway..... | 10 |
| 6.1 Pair with Gateway | 10 |

| | |
|---|---|
| 6.2 Wi-Fi Connection for the Gateway..... | 11 |
| 7. View Online Data on WS View | 11 |
| 8. Appendix | 13 |
| 9. Specification..... | 14 |
| 10.Warranty Information | Fehler! Textmarke nicht definiert. |

1. Introduction

Thanks for your purchasing this DP200 wireless PM2.5 air quality sensor. This device measures PM2.5 content in the air. The data can be streamed by DP1500 Wi-Fi Gateway(sold separately) and can

be viewed on our WS View mobile application after the Wi-Fi configuration done.

To ensure the best product performance, please read this manual and retain it for future reference.

2. Get Started

2.1 Parts List

One PM2.5 Sensor

One USB Cable

One User Manual

3. Overview

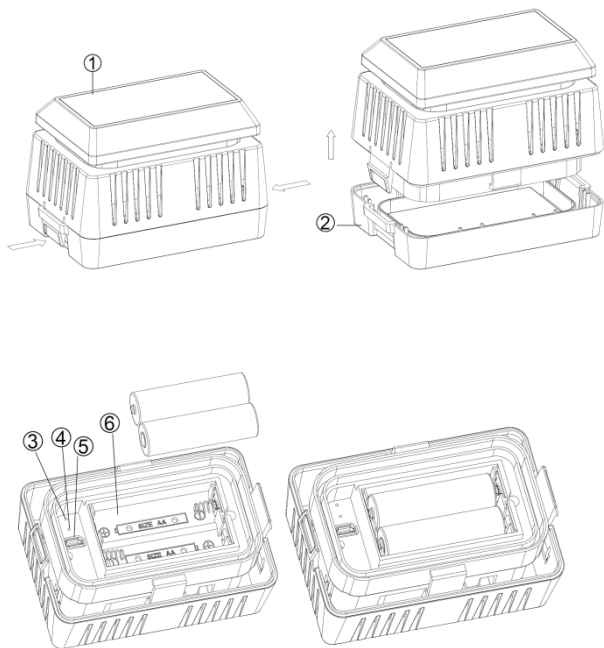


Figure 1

- 1 Solar panel
- 2 Battery Compartment Cover
- 3 Red LED Indicator (RF transmission)
- 4 Blue LED Indicator (charging status)
- 5 USB Port
- 6 Battery Compartment

4. Setup Guide

1. Remove the battery door on the base of their quality sensor.
2. Insert two AA battery.
3. After inserting the battery, the remote sensor LED indicator will light for 4 seconds, and then flash once per 10minutes thereafter. Each time it flashes, the sensor is transmitting data.
4. Close the battery door.
5. Connect the USB cable to a standard USB power adapter and charge battery until blue LED

is turned off, indicating batteries are fully charged.

6. When no sufficient solar radiation is possible, a fully charged set battery can last for about 20 days(about 500hours), and battery status monitor on display will reflect the battery power status. When battery is empty, please charge sensor again.

5. Mounting

Before you mount



Before proceeding with the outdoor mounting detailed in this section, you may want to skip to WiFi configuration instructions in section 6 and onwards first, while you keep the assembled

outdoor sensor package nearby (although preferably not closer than 5 ft from the gateway). This will make any troubleshooting and adjustments easier and avoids any distance or interference related issues from the setup.

After the WIFI configuration is completed and everything is working, return here for outdoor mounting. If issues show up after outdoor mounting they are almost certainly related to distance, obstacles etc.

Outdoor Installation

Use four screws to fix the base of the outdoor sensor on a flat surface.

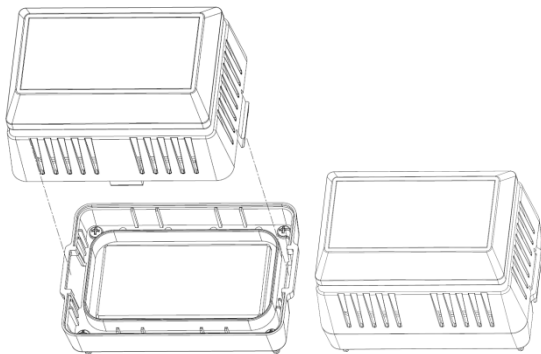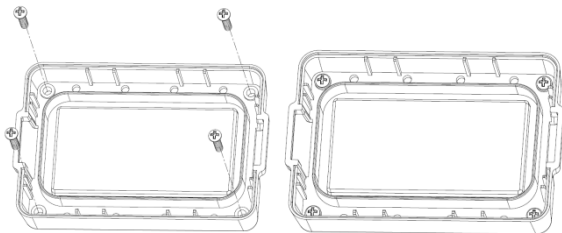

Best Practices for Wireless Communication

Wireless communication is susceptible to

interference, distance, walls and metal barriers. We recommend the following best practices for trouble free wireless communication.

1. **Electro-Magnetic Interference (EMI).**

Keep the console several feet away from computer monitors and TVs.

2. **Radio Frequency Interference (RFI).**

If you have other 915/433/868 MHz devices (same frequency with your device) and communication is intermittent, try turning off these other devices for troubleshooting purposes. You may need to relocate the transmitters or receivers to avoid intermittent communication.

3. **Line of Sight Rating.**

This device is rated at 300 feet line of sight (no interference, barriers or walls) but typically you will get 100 feet maximum under most real-world installations, which include passing through

barriers or walls.

4. Metal Barriers.

Radio frequency will not pass through metal barriers such as aluminum siding. If you have metal siding, align the remote and console through a window to get a clear line of sight.

6. Wi-Fi Configure with gateway

This PM2.5 sensor doesn't have a display function and you need to use our WS View App to view the data on your mobile application after pairing this device with our DP1500 Wi-Fi Gateway(sold separately).

6.1 Pair with Gateway

If DP1500 has been in operation, and you have

never had any DP200 PM2.5 sensor setup before, just power up the sensor and DP1500 will pick PM2.5 data automatically.

If a PM2.5 sensor has been hooked on DP1500 before, and you have a new PM2.5 sensor to replace the old one, unplug DP1500 from USB socket and power up again, then the new sensor will be learned and old sensor will be erased.

6.2 Wi-Fi Connection for the Gateway

For this part, please refer to the manual of the GW1000 Wi-Fi gateway.

Any question, please contact the customer service.

7. View Online Data on WS View

When the Wi-Fi configuration is done, you can view the live data of your PM2.5 sensor on the WS View application.

| Device List | | Live Data | | + |
|--------------------|------------------------|-------------------|------------|----------|
| GW1000B-WIFIA40F | | | | |
| Indoor Temperature | 28.0 °C | Indoor Humidity | 63 % | |
| Absolute Pressure | 1011.3 hpa | Relative Pressure | 1011.3 hpa | |
| PM2.5 | 54.0 ug/m ³ | AQI | 73 | Moderate |
| GW1000B_V1.2.7 | | | | |

Note:

1. The PM2.5 data can be only viewed on the Live Data interface since it doesn't support uploads to weather underground.

If you choose to upload the data to our weather server: www.ecowitt.net, you can view the history graph on the website.

2. This PM2.5 sensor works also with HP1000SE PRO display console(sold separately). The sensor and display console should be at the same

frequency.

8. Appendix

About the Air Quality Levels

| AQI | Air Pollution Level | (ug/m ³ , 24-hour average) | Health Implications | Cautionary Statement (for PM _{2.5}) |
|---------|---------------------|---------------------------------------|--|---|
| 0 - 50 | Good | 0.0-12.0 | Air quality is considered satisfactory, and air pollution poses little or no risk | None |
| 51 -100 | Moderate | 12.1-35.4 | Air quality is acceptable; however, for some pollutants there may be a moderate health concern for a very small number of people who are unusually sensitive to air pollution. | Active children and adults, and people with respiratory disease, such as asthma, should limit prolonged outdoor exertion. |
| 101-150 | Poor | 35.5-55.4 | Members of sensitive groups may experience health effects. The general public is not likely to be affected. | Active children and adults, and people with respiratory disease, such as asthma, should limit prolonged outdoor exertion. |
| 151-200 | Unhealthy | 55.5-150.4 | Everyone may begin to experience health effects; members of sensitive groups may experience more serious health effects | Active children and adults, and people with respiratory disease, such as asthma, should avoid prolonged outdoor exertion; everyone else, especially children, should limit prolonged outdoor exertion |

| | | | | |
|---------|-----------|-------------|---|--|
| 201-300 | Severe | 150.5-250.4 | Health warnings of emergency conditions. The entire population is more likely to be affected. | Active children and adults, and people with respiratory disease, such as asthma, should avoid all outdoor exertion; everyone else, especially children, should limit outdoor exertion. |
| 300+ | Hazardous | 250.5+ | Health alert: everyone may experience more serious health effects | Everyone should avoid all outdoor exertion |

9. Specification

| Measurement | Range | Accuracy | Resolution |
|-------------|------------|---|------------|
| PM 2.5 | 0~999ug/m3 | <p>>100ug/m3, $\pm 15\%$</p> <p><100ug/m3, $\pm 15\text{ug/m}^3$</p> <p>(at 25°C $\pm 5^\circ\text{C}$)</p> <p>When the PM2.5 sensor is placed outdoors, the current temperature -</p> | 1ug/m3 |

| | | | |
|--|--|---|--|
| | | dew point temperature ≤ 2 °C (usually occurs in rain, foggy weather), high humidity air affects the accuracy of the sensor to detect and count the number of particles in the air, pm2.5 reading will be high. | |
|--|--|---|--|

Transmission distance in open field: 100m(300 feet)

Frequency: 868Mhz

Sensor reporting interval: 10 minutes

Power consumption

PM2.5 sensor: 2 x AA 1.2V LSD type NI-MH
batteries (not included)

Solar panel for backup power

Note:

1. Battery type for charging: 2 x AA 1.2V NI-MH batteries(battery life: 3 weeks)
2. It's recommended to recharge the outdoor sensor every two week.
3. Charge time: 3h (The blue LED indicator will light when in charge and be off when full charged)
4. Charge Method: USB charge(USB Cable included)
5. Note: A battery power icon will display on the APP to indicate the battery status of the sensor.